

Florida's Top-Rated  
Metal Roofing Supply Company



863-202-8200  
sales@americanmetalfi.com

# EXPOSED FASTENER

METAL ROOFING SYSTEMS 5V Crimp • Tuff RIB • PBR



## DISTINCTIVE AESTHETICS AND RELIABLE, BUDGET-FRIENDLY PERFORMANCE

Discover the classic aesthetic and durability of Exposed Fastener Metal Roofing Systems. Featuring visible fasteners installed directly through metal panels to the roof deck our expertly crafted exposed fastener panels offer an economical and architecturally striking choice without sacrificing function or durability. Whether it's the coastal charm of our **5V** panel for classic Key West style or the versatility of our **Tuff-RIB** and **PBR** panels, an exposed fastener metal roofing system offers reliable strength and performance. Additional applications include wall and linear panels, as well as interior accents. With over 35 colors to choose from, complete customization is at your fingertips ensuring your project will stand out.

### 5V

- ★ Residential and Commercial Applications
- ★ 1/2" Rib Height
- ★ Anti-Syphon Channel
- ★ Custom Lengths
- ★ Factory or On-Site Rollforming
- ★ Flat, Striated, Pencil Bead and Ribbon Bead Options
- ★ 35+ Color/Coating Options
- ★ Material Warranties up to 45 Years<sup>†</sup>
- ★ Florida Product Approved for HVHZ and Non-HVHZ

### Tuff Rib and PBR

- ★ Residential, Commercial and Agricultural Applications
- ★ 3/4" Rib Height (Tuff RIB) or 1-1/4" (PBR)
- ★ 9" Rib Spacing (Tuff RIB) or 12" (PBR)
- ★ Exterior Wall and Interior Applications
- ★ Factory Rollforming
- ★ 35+ Color/Coating Options
- ★ Material Warranties up to 45 Years<sup>†</sup>
- ★ Florida Product Approved for HVHZ and Non-HVHZ

Florida's Top-Rated  
Metal Roofing Supply Company




863-202-8200  
sales@americanmetalf.com

# EXPOSED FASTENER

METAL ROOFING SYSTEMS 5V Crimp • Tuff RIB • PBR

## 5V


Net Coverage: 24" Width  
Rib Height: 1/2"  
Rib Spacing: 12"

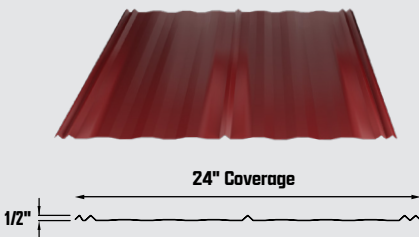

All dimensions nominal.

## TUFF RIB


Net Coverage: 36" Width  
Rib Height: 3/4"  
Rib Spacing: 9"

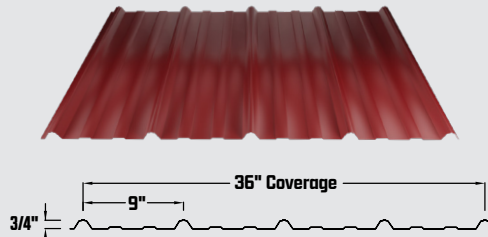

All dimensions nominal.

## PBR

Net Coverage: 36" Width  
Rib Height: 1-1/4"  
Rib Spacing: 12"

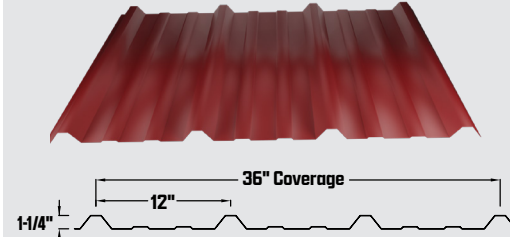

All dimensions nominal.

## Exposed Fastener Panel Specifications:

### MATERIAL

- AZ55 - 29ga\*, 26ga & 24ga
- AZ50 - 29ga\*, 26ga & 24ga

\*29ga AZ50 is not stocked and is available for Tuff-Rib only.

### SUPPORT

- 15/32" (Min.) Plywood
- 3/4" Wood Plank
- Red Iron Steel Frame

### SLOPE

• 1:12<sup>‡</sup>

<sup>‡</sup>Minimum slope with sealant per FBC 1507.4.2; consult with local municipality for applicable controlling building codes that may affect project.

### COATINGS

- Mill-Finish (AZ55)
- 70% PVDF Kynar 500® (AZ50 26ga & 24ga)
- SMP (AZ50 29ga\* and 26ga)

©2024 AmericanMetalSupply. <sup>‡</sup>Contact a sales representative for detailed product and warranty information.



AMERICANMETALFL.COM



11/2024